

Valvole per flusso unidirezionale BA


Acciaio Inox AISI 316

No-Return Valves

316 Stainless steel

Apertura Standard 0.5 bar - Su richiesta fino a 8 bar
Standard Cracking Point 0.5 bar - On request up to 8 bar

Guarnizioni in Viton Standard/Altro a richiesta
Standard Viton Seals/Else on request

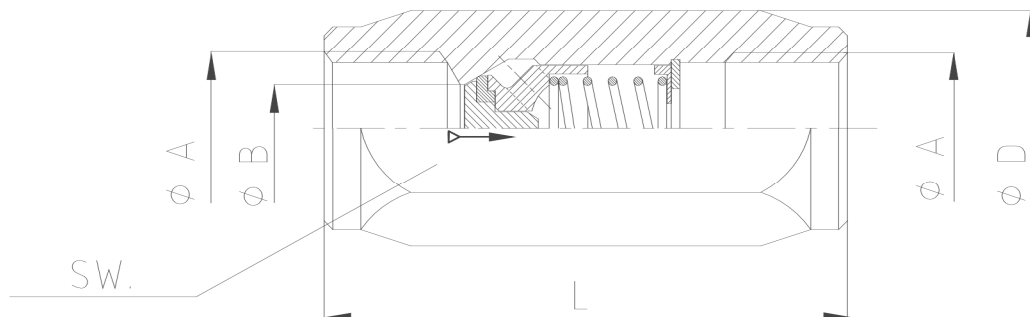

ØA-xx inch	L mm.	SW mm.	Ø B mm.	S mm ²	WP Bar	M Kg.
1/8"-04	42	14	5	18	350	0.05
1/4"-06	50	19	7	22	350	0.09
3/8"-09	60	24	10	42	350	0.16
1/2"-13	65	27	11	75	350	0.28
3/4"-19	75	34	17	126	300	0.35
1"-25	93	41	21	230	250	0.58
1" 1/4-30	110	50	29	340	250	0.96
1" 1/2-40	112	55	34	509	250	1.02
2"-50	120	75	48	1640	200	2.20

ORDER CODE: 90XX