



Flow dividers with four equal sub-flows

Series 200 PR

Variants


--: standard, without mounting brackets

A: standard version with mounting brackets

S: designed for higher pressure without mounting brackets

B: designed for higher pressure with mounting brackets

T: designed for higher pressure with mounting brackets and with increased division accuracy

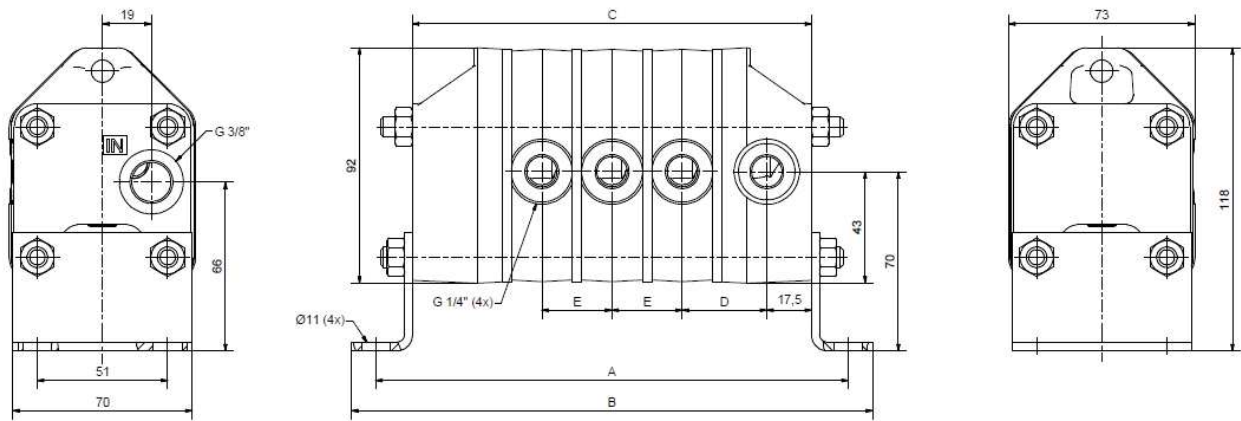

Max. speed: temporary 3500 rpm

model	number of sections	max. inlet flow (dm ³ /min)	displacement per section (cm ³ /rev.)	max. pressure continuous (bar)		max. pressure intermittent (bar)		max. pressure diff. between sections (bar)		dim. A ⁺² (mm)	dim. B ⁺² (mm)	dim. C (mm)	dim. D (mm)	dim. E (mm)
				--/A	S/B/T	--/A	S/B/T	--/A	S/B/T					
PR 201-59	4	15	1.1	140	210	175	320	175	175	184	204	155.5	32.9	27.4
PR 202-59	4	27	1.9	140	210	175	320	175	175	193	213	164.7	35.2	29.7
PR 204-59	4	46	3.3	110	210	140	320	110	110	211	231	182	39.5	34.0

Ordering code: model – variant

Example: PR 201-59-B